

AQUACONNECT

INSTALLATION GUIDE

CONNECTED AQUABIKE KIT

PAGINATION

INSTRUCTIONS FOR THE CONNECTED KIT	3
HANDLEBAR SUPPORT INSTALLATION	4
FIXING THE SENSOR BOX TO THE FRAME	5
FIXING THE MAGNET BOX TO THE CRANK	6
DISTANCE BETWEEN THE TWO HOUSINGS	7
TIGHTEN THE RILSANS AND CUT	8
INTEGRATE THE CABLE IN THE HANDLEBAR HOLDER	9
CONNECT THE ELECTRONIC BOX WITH THE CABLE CONNECTOR	11
CLIP THE CASE INTO THE HEART OF THE COBRA	12
INSERT THE SMARTPHONE	13
SPARE PARTS NOMENCLATURE	14
CONTACT INFORMATION, CURRENT STANDARDS AND TERMS OF USE	15


INSTRUCTIONS FOR THE CONNECTED KIT

General introduction sheet :

Tools not included required



Ø 3
Ø 6
(hexagonal key)



Included in the packaging

- 1 Cobra handlebar support + mounting bracket + 2 screws
- 2 Wired sensor box + rilsans
- 3 Magnet housing + rilsans
- 4 Electronic box
- 5 Waterproof pouch
- 6 Charging cable (USB)

Overview :



 AquaNess

www.aquaness.com

HANDLEBAR SUPPORT INSTALLATION

Install the cobra mount on the right side of the handlebar for a central display



Tighten the two screws to secure the cobra mount to the handlebar




 AquaNess


www.aquaness.com

FIXING THE SENSOR BOX TO THE FRAME

Caution! The cable must be oriented towards the handlebars

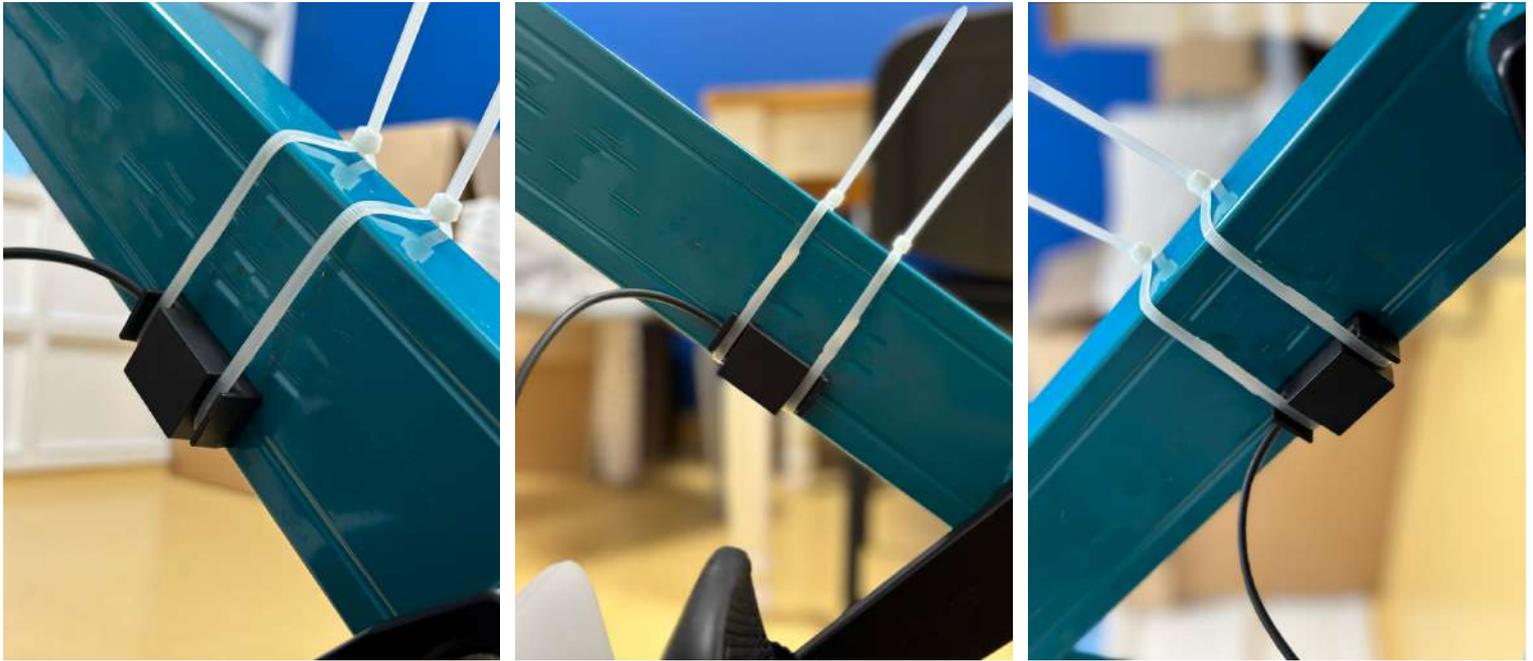

If the space between the frame and the crank is too small, position the wired sensor box under the frame and fix it with two rilsans also

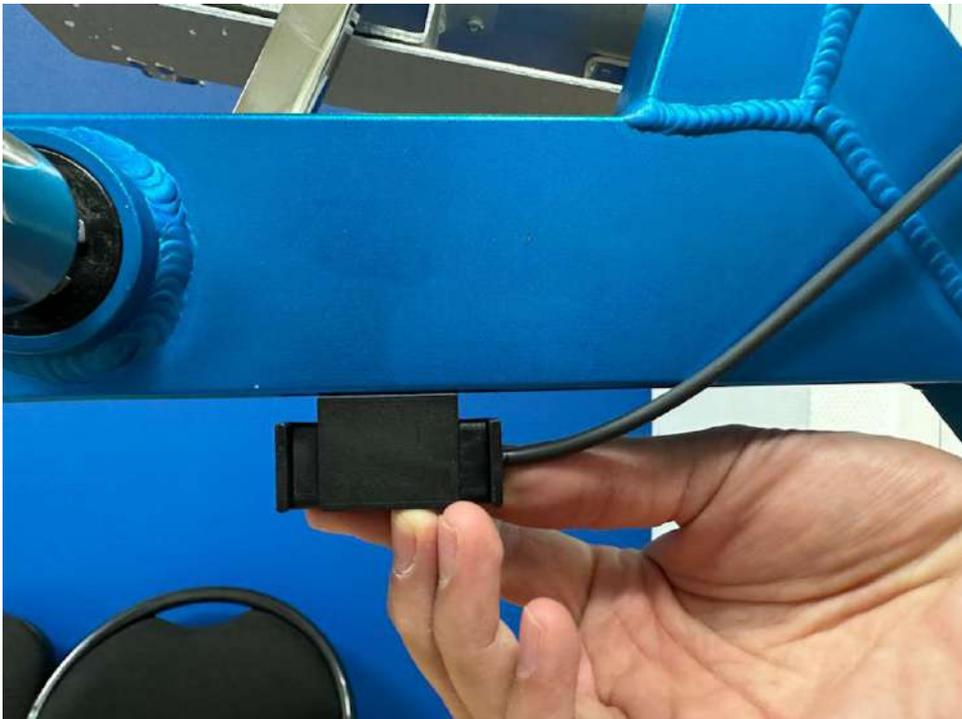

FIXING THE MAGNET BOX TO THE CRANK

Attach the magnet box to the crank handle with two braids

Caution! If the housing moves slightly, attach two additional for an optimal fixation.




You can also drill then tap into the crank of your aquabike with two screws for an optimal fixation (this operation remains technical and must be done by qualified people)

DISTANCE BETWEEN THE TWO HOUSINGS

The space between the two boxes must be less than 8mm for an optimal connection

Caution! The magnet box on the crank must pass in the middle of the sensor box on the frame for optimal detection

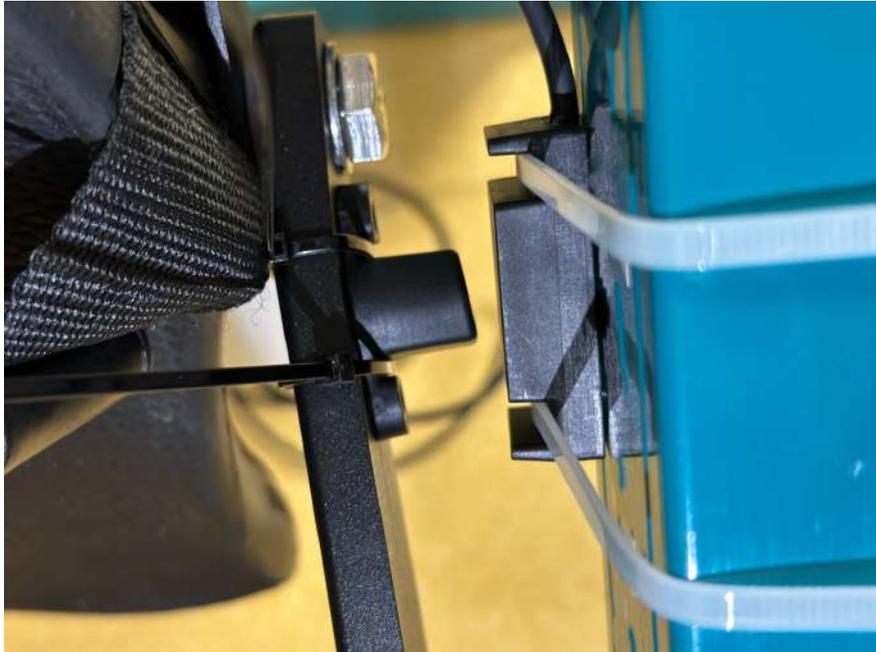

 AquaNess

www.aquaness.com

TIGHTEN THE RILSANS AND CUT

Tighten the rilsans with pliers and cut



Add rilsans along the frame to secure the cable




 AquaNess


www.aquaness.com

INTEGRATE THE CABLE IN THE HANDLEBAR HOLDER

1 – Pass the cable that comes up from the frame in the round at the front of the support

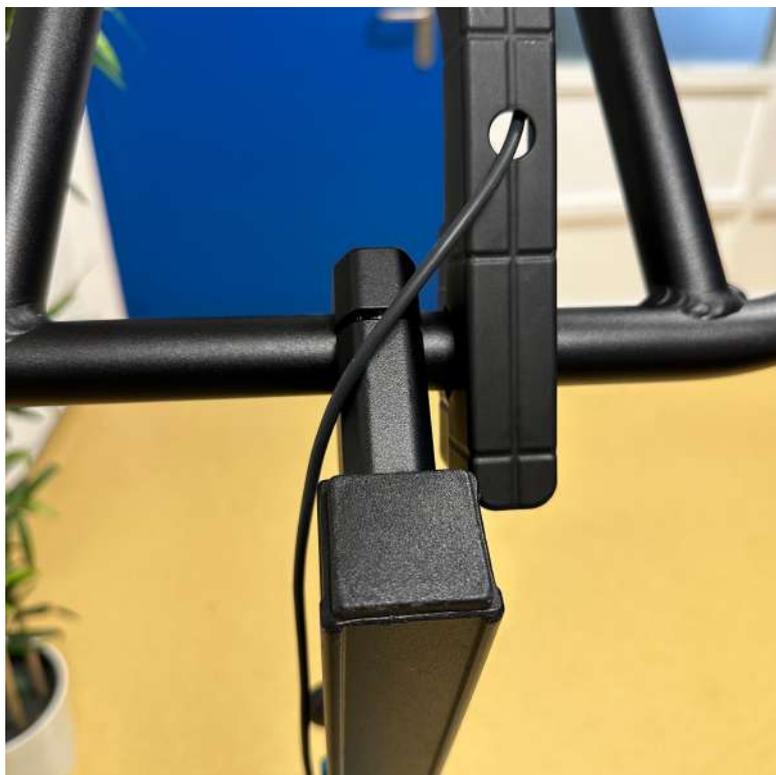


2 – Clip the cable to the back of the bracket

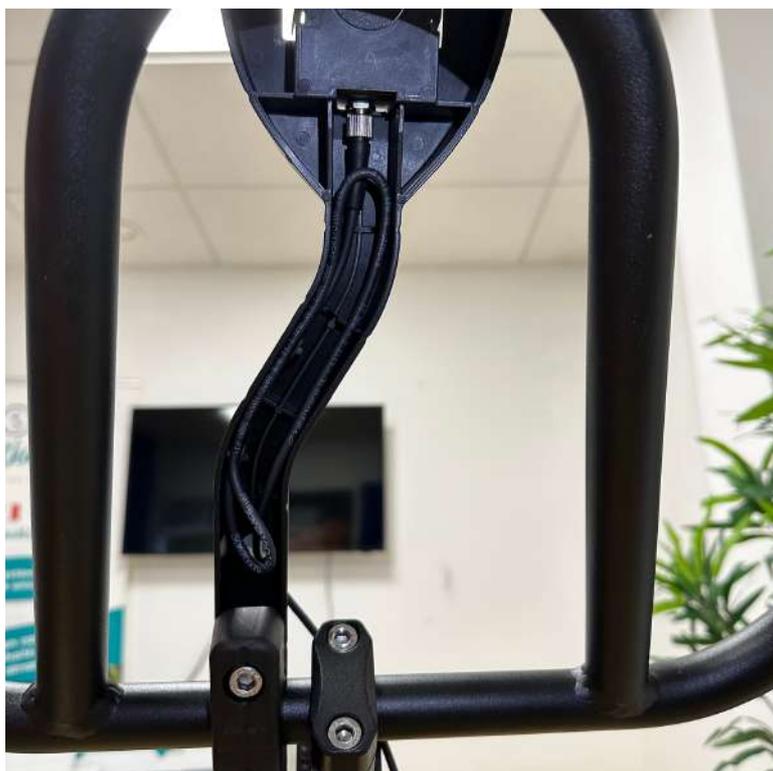

 AquaNess

www.aquaness.com

3 - Pass the cable through the heart of the cobra

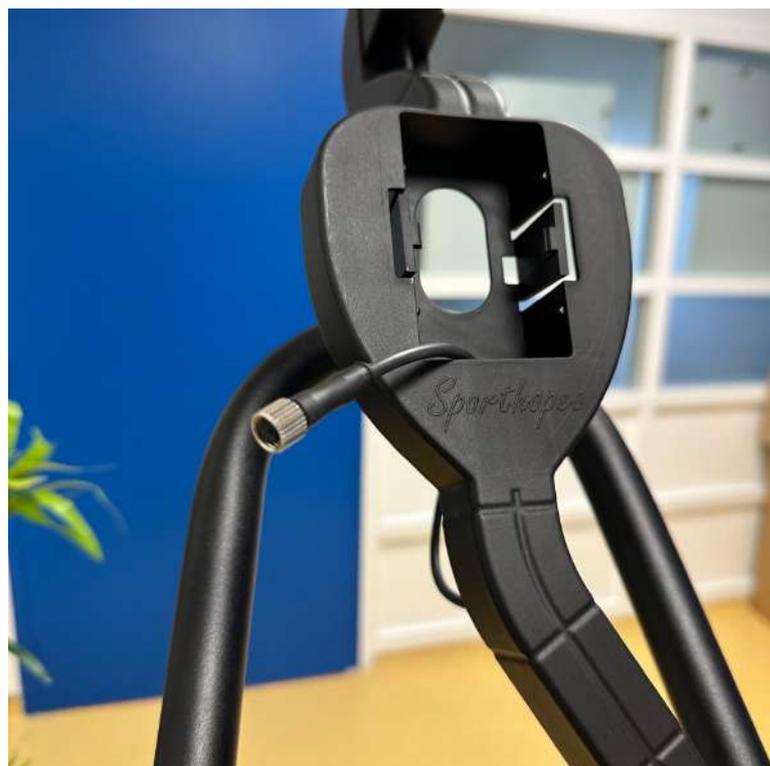

 AquaNess

www.aquaness.com

CONNECT THE ELECTRONIC BOX WITH THE CABLE CONNECTOR

Screw the cable connector to the connector of the electronic box, tightening it to the maximum.


Caution! Make sure to observe the coding when plugging in

To be screwed to the edge of the pool



CLIP THE CASE INTO THE HEART OF THE COBRA

Caution! To unclip the box from the cobra's heart, push it from the back of the cobra's support **1** then unscrew the cable from the electronic box **2** (To be unscrewed at the edge of the pool)

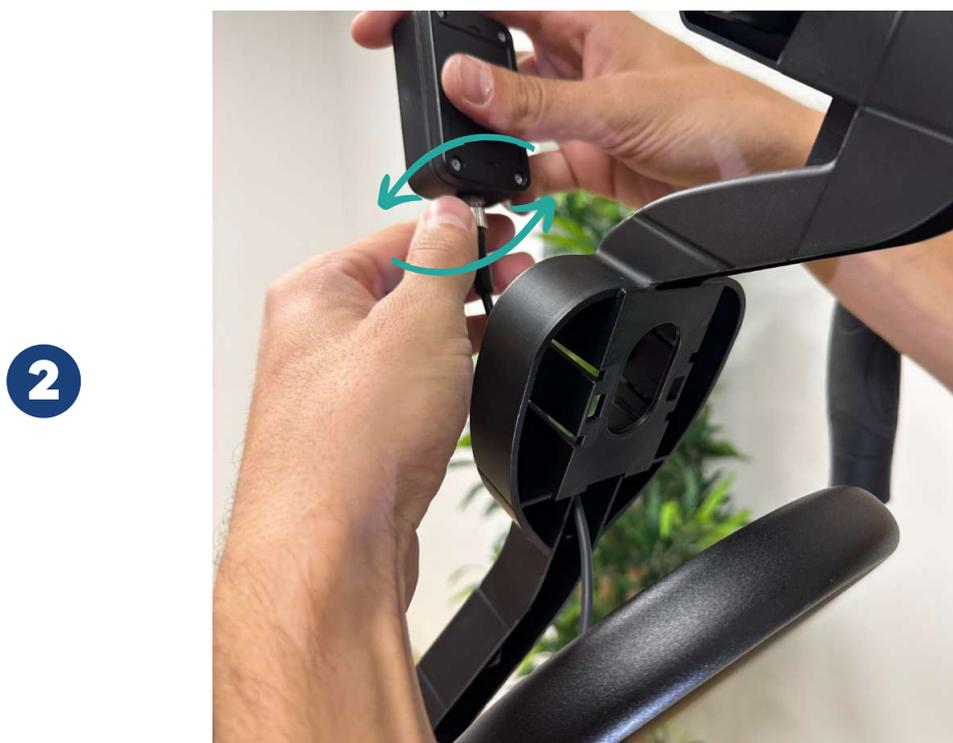

 AquaNess

www.aquaness.com

INSERT THE SMARTPHONE

Insert the smartphone in the waterproof pouch and slide it into the cobra holder

Caution! Install and uninstall the smartphone in the pouch at the poolside



Caution! Close the two mechanical locks of the pouch so that it is perfectly waterproof



 AquaNess

www.aquaness.com

SPARE PARTS NOMENCLATURE

SPARE PARTS :

ITEM CODE	DESIGNATION
SPOTOPAQ001A	KIT CONNECTÉ COMPLET
SPOTOPAQ002A	SUPPORT COBRA
SPOTOPAQ003A	CAPTEUR SPORHOPEO AVEC CORDON
SPOTOPAQ004A	CAPTEUR AQUANESS AVEC CORDON
SPOTOPAQ005A	BOÎTIER AIMANT

CONTACT INFORMATION, CURRENT STANDARDS AND TERMS OF USE

Aquaness



18 rue de la Bergerie 67310
ALLENWILLER



aquaness.france@aquaness.fr



www.aquaness.com

CURRENT STANDARDS



Reference standard : EN 62368-1

(concerns information and communication technology equipment as well as audio-video technology equipment used in the professional or consumer field with a nominal voltage not exceeding 600 V)

TERMS OF USE

Operating temperature between 5 and 35 degrees
The battery must be recharged out of the water
Replacement of the battery only by Sporthopeo

 AquaNess

www.aquaness.com

AQUACONNECT

IT'S UP TO YOU

**CONNECT YOUR AQUABIKE NOW BY
USING THE USER MANUAL**